

# WGen3600



## 3600 Watt Open Frame Gasoline Portable Generator

3600 Running Watts | 4650 Peak Watts

Rugged roll bars for added strength and protection

Fuel gauge on top of 4 gal. tank



30 amp TT-30R Recreational Vehicle Outlet


Single U-shaped folding handle makes moving the generator easy with one hand

Easy start yellow touch points on choke, engine control switch and oil fill cap

Dependable 5.9 HP 212cc OHV 4-Stroke Westinghouse engine



Pulse-Flo™ quiet muffler with EPA and CARB compliant emissions

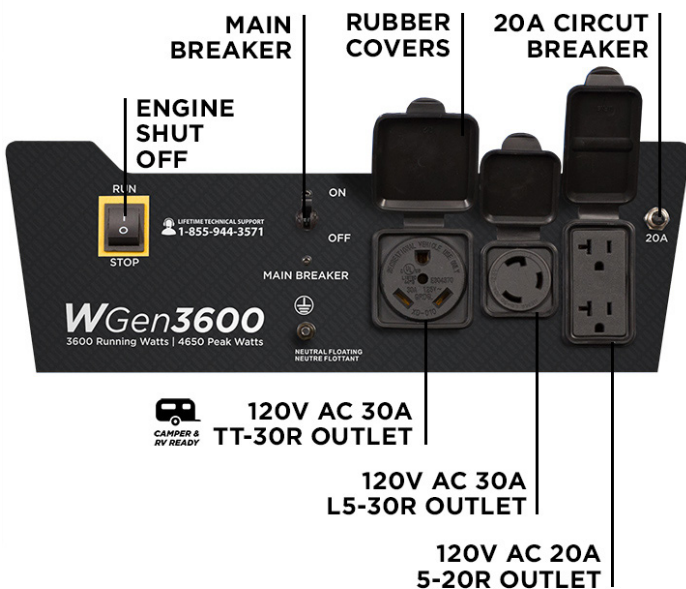

### What Comes in the Box



# WGen3600

## Generator Specifications



Gasoline Running Watts	3600
Gasoline Peak Watts	4650
Running Amps at 120V	30 amps
Peak Amps at 120V	38 amps
AC Voltage	120 Volts
AC Frequency	60 Hz
Engine Horse Power (HP)	5.9 HP
Total Harmonic Distortion (THD)	<23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Recoil
Battery	No
Push Button Start	No
Engine Displacement	212cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine RPM	3600
Operational Volume (dBA)	as low as 69 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140544
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	.6 qt. (20.3 oz.)
Oil Capacity (Quarts/Ounces)	.6 qt. (20.3 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	4 gal. (15 L)
Run Time at %25 Load (hrs.)	18 hrs.
Run Time at %50 Load (hrs.)	13.5 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Manual
Choke Location	Above Air Filter

AC Outlets	(1) 120V 30A (TT-30R) (1) 120V 30A (L5-30R) (1) 120V Duplex 20A (5-20R)
Ground	Neutral Floating
Covered Outlets	Yes
Transfer Switch Ready	No
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	No
VFT Data Center (volts, frequency, lifetime hours)	No
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle Style	Single Handle with Foam Grip
Wheel Kit Included	Yes
Wheel Size	8 in. Diameter, 2 in. Wide
Wheel Type	Polyurethane
Frame Thickness in. (mm)	1 in. (25 mm)
Emissions	EPA, CARB
Canada CSA Compliant	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	24 in. (610 mm)
Assembled Width in. (mm)	23 in. (584 mm)
Assembled Height in. (mm)	21.5 in. (546 mm)
Extended Length in. (mm)	34.5 in. (876 mm)
Carton Length in. (mm)	27 in. (686 mm)
Carton Width in. (mm)	18.5 in. (470 mm)
Carton Height in. (mm)	19 in. (483 mm)
Dry Unit Weight lb. (kg)	107 lb. (49 kg)
Shipping Weight lb. (kg)	112 lb. (51 kg)
UPC	855464003964
GTIN	00855464003964

09112018KD  
 ©2018 Westinghouse Portable Power  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
 at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
 855.944.3571**

