

# WGen6000



## 6000 Watt Open Frame Gasoline Portable Generator

6000 Running Watts | 7500 Peak Watts

Fuel gauge on top of 6.6 gal. tank



Rugged roll bars for added strength and protection


VFT Data Center displays volts, frequency and lifetime hours

Electric start, battery included

Dependable 13 HP 420cc OHV 4-Stroke Westinghouse engine



Pulse-Flo™ quiet muffler with EPA & CARB compliant emissions

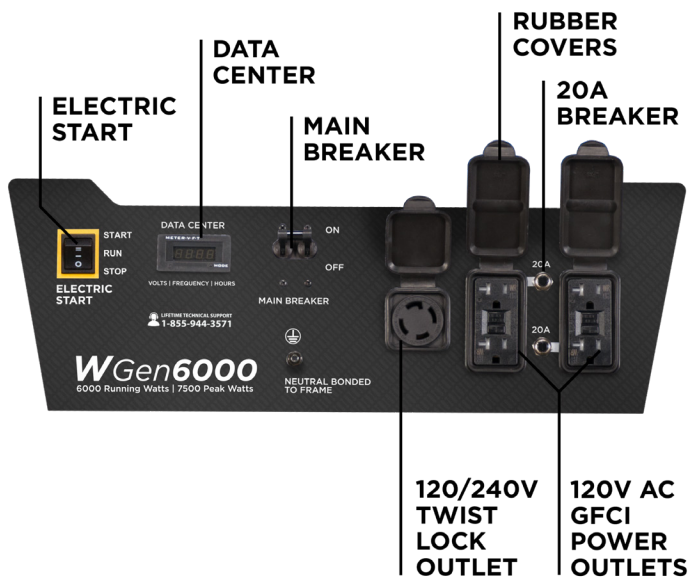

### What Comes in the Box



# WGen6000

## Generator Specifications



Gasoline Running Watts	6000
Gasoline Peak Watts	7500
Running Amps	50A @ 120V 25A @ 240V
Peak Amps	62A @ 120V 31A @ 240V
AC Voltage	120/240 Volts
AC Frequency	60 Hz
Engine Horse Power (HP)	13 HP
Total Harmonic Distortion (THD)	<23%
Automatic Voltage Regulator (AVR)	Yes
Starting System	Electric, Recoil
Battery	Yes
Push Button Start	No
Engine Displacement	420cc
Engine Brand	Westinghouse
Engine Type	OHV 4 Stroke
Engine RPM	3600
Operational Volume (dBA)	as low as 72 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140545
Auto Idle Control	No
Built-in Inverter	No
Engine Lubrication	Splash
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	1.1 qt. (37.2 oz.)
Oil Capacity (Quarts/Ounces)	1.1 qt. (37.2 oz.)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, %10 Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	6.6 gal. (25 L)
Run Time at %25 Load (hrs.)	18 hrs.
Run Time at %50 Load (hrs.)	13 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Manual

Choke Location	Above Air Filter
AC Outlets	(1) 120/240V 30A (L14-30R), (2) Duplex 120V 20A GFCI (5-20R)
DC Outlets	(2) 5V USB ports
Ground	Neutral Bonded
Covered Outlets	Yes
Transfer Switch Ready	Yes
Westinghouse Portable Transfer Switch Ready (ST Switch)	No
GFCI Outlets	Yes
VFT Data Center (volts, frequency, lifetime hours)	Yes
RV Ready Outlet	No
Overload Protection (circuit breaker)	Yes
Handle Style	Single Handle with Foam Grip
Wheel Kit Included	Yes
Wheel Size	10 in. Diameter, 2.5 in. Wide
Wheel Type	Polyurethane
Frame Thickness in. (mm)	1.25 in. (32 mm)
Emissions	EPA, CARB
Canada CSA Compliant	No
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	27.2 in (691 mm)
Assembled Width in. (mm)	26.5 in. (673 mm)
Assembled Height in. (mm)	26 in (660 mm)
Extended Length in. (mm)	40.5 in. (1,029 mm)
Carton Length in. (mm)	31 in. (787 mm)
Carton Width in. (mm)	21.5 in. (546 mm)
Carton Height in. (mm)	23 in. (584 mm)
Dry Unit Weight lb. (kg)	174 lb. (79 kg)
Shipping Weight lb. (kg)	182 lb. (83 kg)
UPC	855464003483
GTIN	00855464003483

09102018KD  
 ©2018 Westinghouse Portable Power  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
 at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
 855.944.3571**

